



**Esempio cablaggio massimo con comuni separati**  
*Example of maximum wiring with separate commons*  
 Exemple de câblage maximum avec communs séparés  
 Beispiel einer maximalen Verkabelung mit getrennten gemeinsamen Kontakten  
 Ejemplo de cableado máximo con comunes separados  
 Voorbeeld maximale bedrading met gescheiden gemeenschappelijke draden  
 Exemplo: cablagem máxima com contactos comuns separados  
 Παράδειγμα μέγιστης καλωδίωσης κοινού καταμερισμού

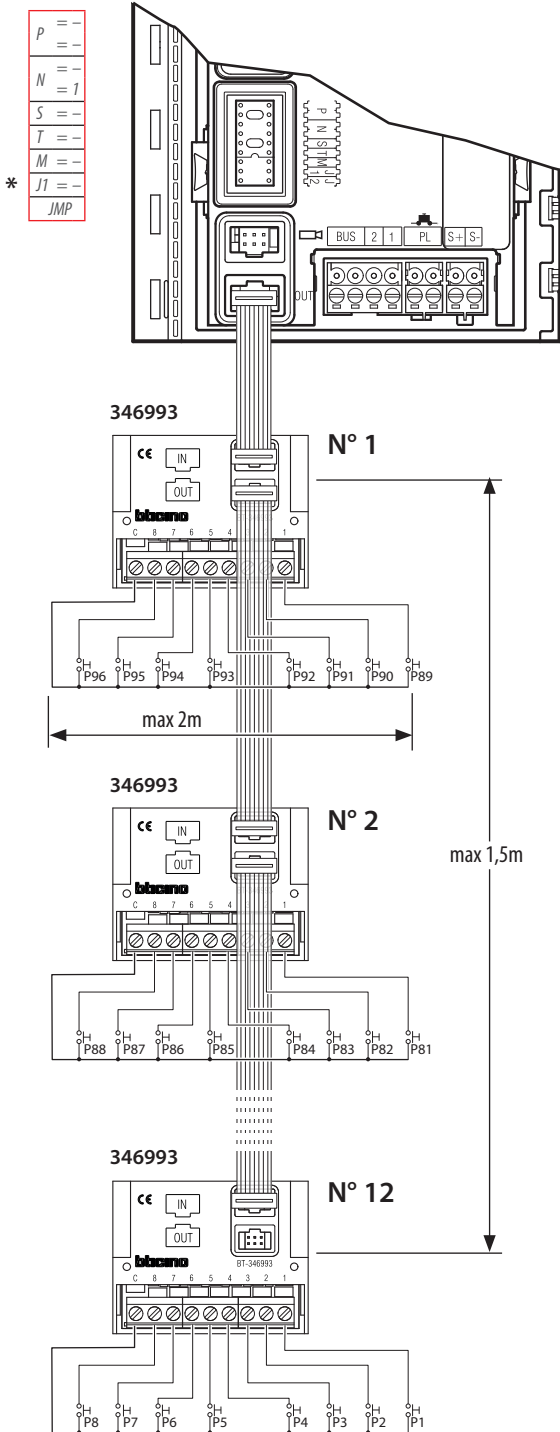

\*  
 Rimuovere il configuratore J1  
 Remove the configurator J1  
 Retirer le configurateur J1  
 J1-Konfigurator entfernen

**Esempio cablaggio massimo a comune unico**  
*Example of maximum wiring with unique common*  
 Exemple de câblage maximum à commun unique  
 Beispiel einer maximalen Verkabelung mit einem einzigen Kontakt  
 Ejemplo de cableado máximo con un común único  
 Voorbeeld maximale bedrading met één gemeenschappelijke draad  
 Exemplo: cablagem máxima com contacto comum único  
 Παράδειγμα μέγιστης καλωδίωσης μοναδικού καταμερισμού

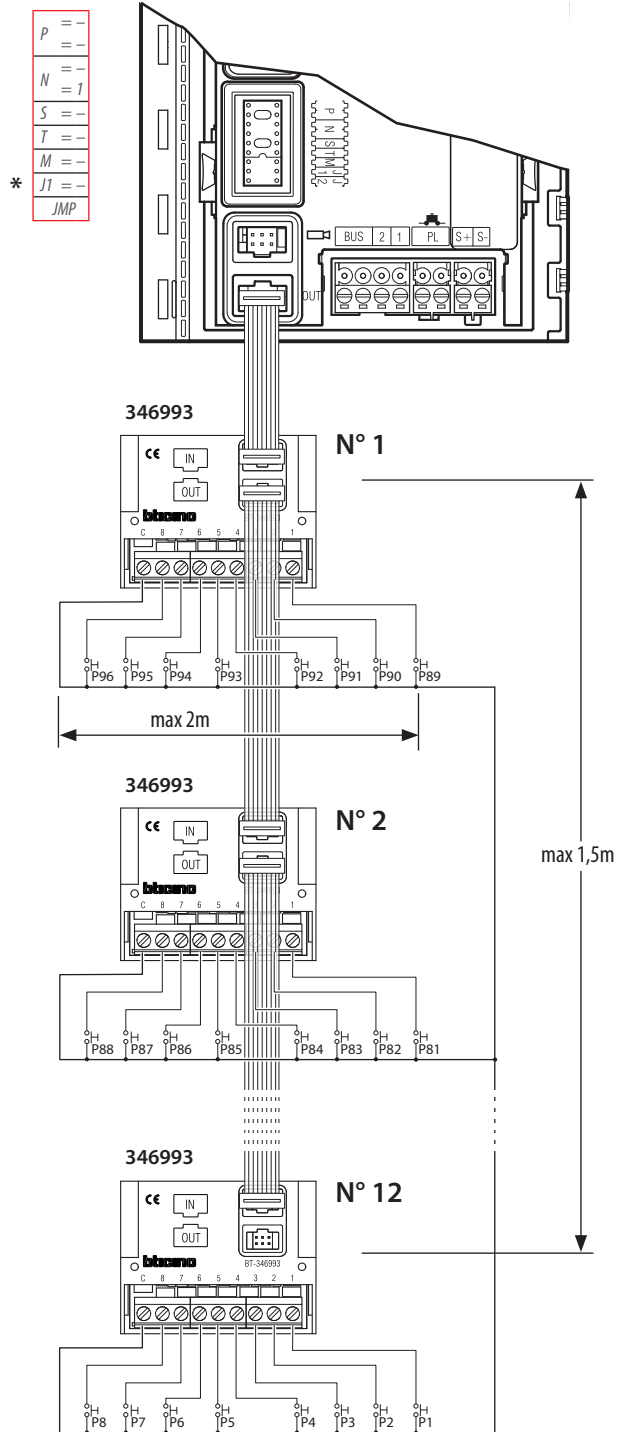

\*  
 Retirar el configurador J1  
 Verwijder de configurator J1  
 Remover o configurador J1  
 Αφαιρέστε τον διαμορφωτή J1

## Expander pushbutton module

346993

## Description

The expander pushbutton module gives the possibility of connecting call pushbuttons to the SFERA speaker modules (items BT-351000; BT- 351100; BT- 351200; BT- 351300). Each module can manage up to 8 call pushbuttons. It is possible to connect several expander pushbutton modules (max 96 call pushbuttons for each Entrance Panel).


## Technical data

Power supply from SCS BUS:	18 - 27 Vdc
Max. absorption	1.5 mA
Absorption in stand by	1.5 mA
Operating temperature:	(-25) - (+70)°C

## Related items

351000	SFERA - Base speaker module
351100	SFERA - Speaker module
351200	SFERA - Audio video module
351300	SFERA - Wide angle audio and video module


Front view

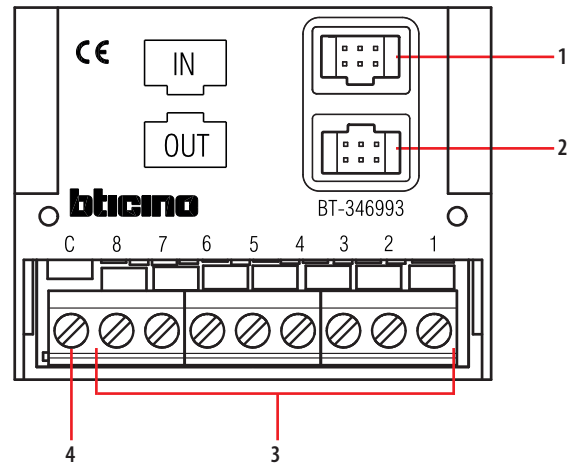

## Legend

1. Input connector from previous module
2. Output connector towards subsequent module
3. Call pushbutton connection
4. Common pushbuttons

## Dimensional data

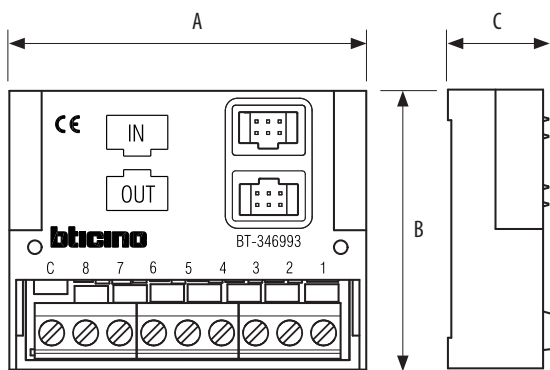

A	B	C
52.5 mm	41 mm	14 mm