

### 1. USE


Centralised control for wired roller shutter/curtains switches.  
 Can be installed in place of an existing switch.  
 Can control up to 20 roller shutter/curtains switches

### 2. RANGE

Connected wireless control for roller shutters/curtains.  
 Supplied with rocker plate and a battery.  
 Equipped with an LED indicator (configuration).  
 Hidden reset button used to return to factory settings.  
 1 module



White		Magnesium	
5 742 74		5 742 95	

### 3. DIMENSIONS (mm)

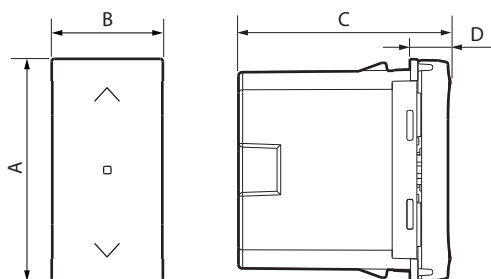

A	B	C	D
45	22.5	43	8

### 4. OPERATION

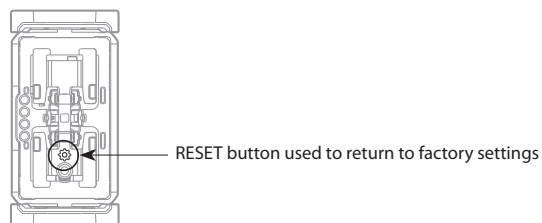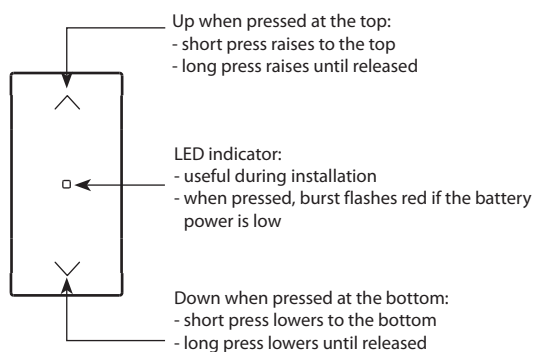

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Protection against impacts: IK 04  
 Protection against solid bodies and/or liquids: IP 21 D

#### ■ 5.2 Material characteristics

Rocker plate: ABS White RAL 9003  
 ABS Magnesium painted

Mechanism casing: PC

Halogen-free  
 UV-resistant

Self-extinguishing: 650°C/30 s

#### ■ 5.3 Electrical characteristics

Powered by a CR2032 - 3 V lithium battery (supplied)  
 Battery life: 8 years for 10 activations a day

**ZigBee radio technology:** Frequency: 2.4 GHz to 2.4835 GHz  
 Power level: < 100 mW

#### ■ 5.4 Climate characteristics

Storage temperature: 0°C to + 45°C  
 Usage temperature: +5°C to + 45°C

## 6. CLEANING

Clean the surface with a cloth.  
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

**Caution:** Always test before using special cleaning products.



Take care to recycle the battery appropriately.

## 7. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (5 742 74/95) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: [www.legrandoc.com](http://www.legrandoc.com)